



NWP222

Network in- & output panel - 2 x XLR in- & out + BT (4 x 2 CH)

Highlights:

- 2 x XLR inputs & outputs
- Integrated Bluetooth receiver
- 4-channel Dante™/AES67
- Internal mixing & DSP processing

Product information:

The NWP222 is a Dante™/AES67 network input panel, featuring two XLR input and output connectors and an integrated Bluetooth receiver, which can be used to transmit or receive audio signals in a Dante™ audio network. The audio inputs can be switched between line-level and microphone-level audio signals and phantom power (+48 V DC) can be applied to the XLR input connectors for powering condenser microphones.

Various further integrated functions such as integrated equalizing, automatic level control and other device settings can be configured through the AUDAC Touch™ app.

The front panel is finished with high-grade materials such as hardened glass makes them blend into any environment. These wall panels are compatible with standard EU-style in-wall boxes, these wall panels are the ideal solution for solid and hollow walls.

The IP-based communication makes it future-proof while also being backwards compatible with many existing products. In contrast, the limited PoE power consumption makes it compatible with any PoE network-based installation.



Certification:



Properties:

Internal mixing & EQ

Additional Inputs:

Bluetooth

System specifications:

| | |
|-------------------------|----------------------------------|
| Inputs | 2 x XLR female (in) |
| | 2 x XLR male out |
| Control | 2 buttons - Mic / Line switching |
| Indicators | 2 LED's (RGB) - Input status |
| Configurable settings | IP settings |
| | Device name |
| | Input range (Mic / Line) |
| | Gain |
| | Phantom power |
| | DSP (EQ) |
| | Mixing |
| Configuration | Audac Touch™ |
| Integrated DSP | Yes (EQ) |
| Automatic level control | Yes |
| Phantom power | +48 V DC |
| Power Supply | PoE powered (IEEE 802.3at) |
| Connectors | XLR Female (mic in) |
| | RJ45 (network + PoE) |
| | 1 x XLR male (audio out) |

Product Features:



| | |
|-----------------------|---|
| Construction | ABS |
| Front finish | Elegant ABS front panel with glass |
| Dimensions | 160 x 88 mm (W x H) (Remote wall panel) |
| Colours | White (RAL9003) (DWP240/W) |
| | Black (RAL9005) (DWP240/B) |
| Compatible devices | Any Dante™/AES67 compatible audio device |
| Installation standard | Compatible with EU installation materials |

Variants:




- NWP222/B - Black version
- NWP222/W - White version


Architects' and Engineers' Specifications:

Dante™/AES67 network input panel shall have two XLR input connections, two XLR output connections, and a Bluetooth receiver. The network input panel shall have 4 x 4 Dante™/AES67 network audio I/O channels. Phantom power shall be available on XLR inputs. Pre-gain shall be available for microphone/line level adjustment on XLR inputs. The available DSP processing functionality on the inputs shall include Automatic Gain Control (AGC), 7-band parametric equalizing, and volume. The output channels shall include mixer, volume, and gain functionality. The mixer shall be able to mix all mapped input sources on the selected output. There shall be two physical buttons with LED indicators on the front panel. Pressing a button for 3 seconds shall change the LED indicator color between green (line level) and red (microphone level). A total system control application shall be freely available and compatible with a wide variety of operating systems, including Android, iOS, Windows, and Mac. Default input signal levels shall be changed by using the application. Pressing and holding both buttons shall enable Bluetooth pairing when both LEDs blink in blue color. The brightness of the LED indicators shall be adjustable and button functions shall be disabled by using the application. The Bluetooth input settings in the application shall allow for the change of the Bluetooth device name, show known devices, and discovery for pairing. The wall panel housing shall be constructed out of ABS with a front panel of glass. The device shall have a built-in depth of 75 mm and shall be compatible with most standard EU (80x80 mm) style in-wall boxes for solid and hollow walls. It shall have an optional US-style adapter kit. The power supply shall be transferred over PoE (Power over Ethernet) compatible with the IEEE 802.3bt standard. Its weight shall not exceed 0.22 kg.

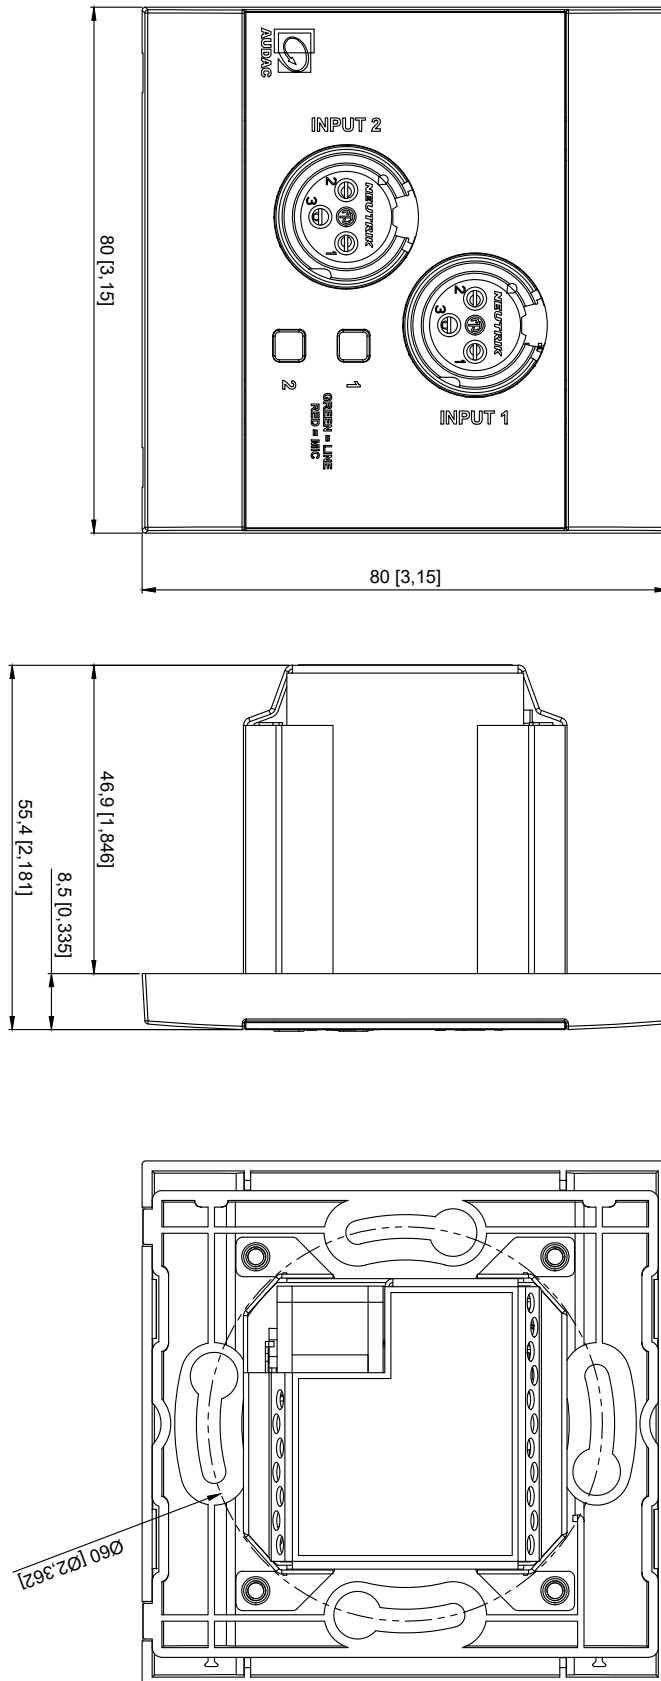

| | | | | |
|---------------------|--------------|---|--------------------|----------------------|
| NWP220 | | Product description | | |
| | | DANTE/AES67 NETWORKED AUDIO INPUT PANEL 2XXLR & BT (4CH) + POE | | |
| MM [INCH] | Scale | Outer dimensions (w x h x d) | Unit height | Weight |
| | 1 : 1 | 80 X 80 X 55,4 mm 3,15 X 3,15 X 2,21" | N/A | 0,12 kg 0,265 lbs |

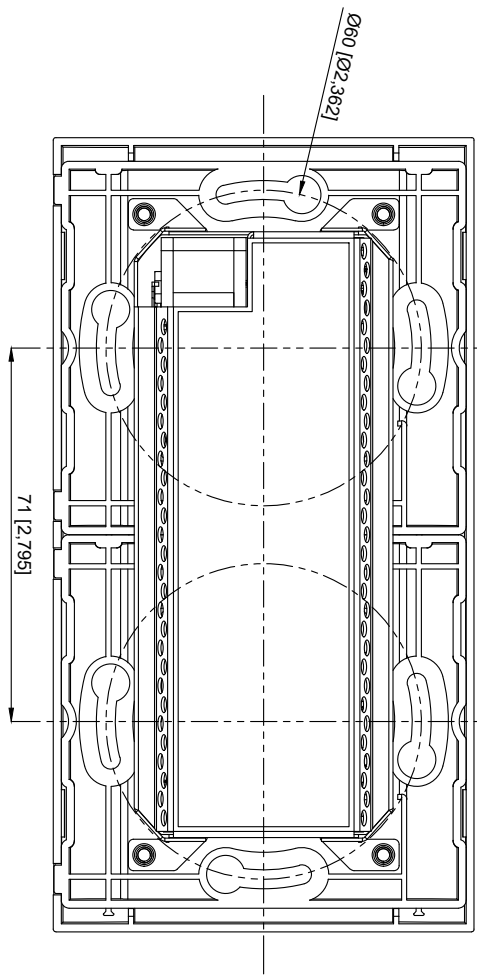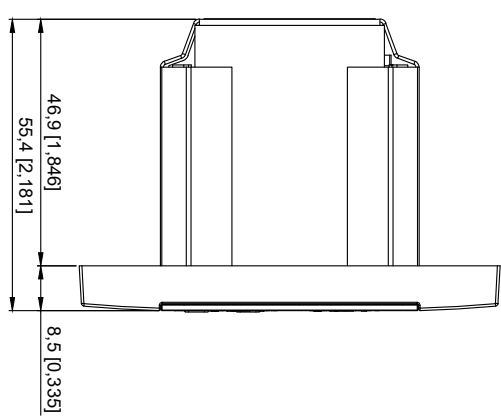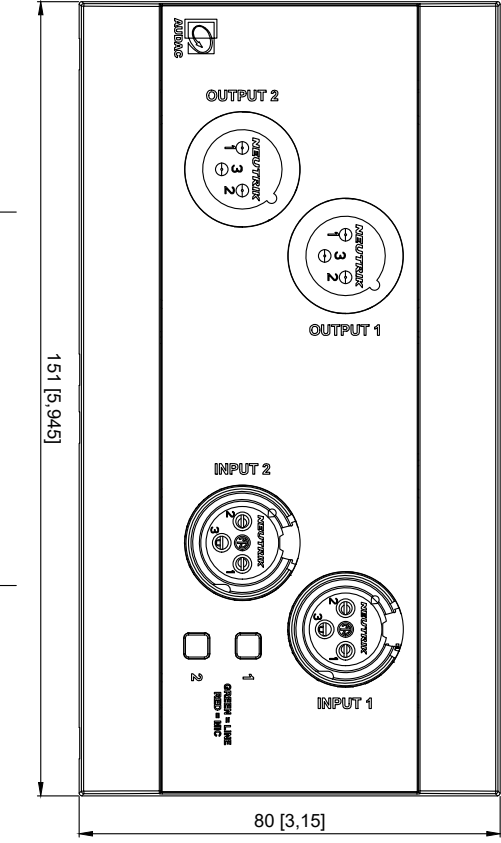

| | | | | | |
|--|-------|--|--|----------------------------|----------------------|
|  | | NWP222 | | Product description | |
| | | DANTE/AES67 NETWORKED AUDIO IN&OUTPUT PANEL 2xXLR IN & 2xXLR OUT & BT (4x2CH) + POE | | | |
| MM [INCH] | Scale | Outer dimensions | | Unit height | Weight |
| | 4 : 5 | (w x h x d) 151 x 80 x 55.4 mm 5.945 x 3.15 x 2.181 " | | N/A | 0.22 kg 0.485 lbs |