



CP10

Applications

- Conference room
- Church
- Fill system

Feature


- 75mm HF compression driver
- Low frequency response extend to 50Hz
- Excellent vocal performance

Technical specification


- **FREQUENCY RESPONSE:** 65 Hz~18 kHz(± 3 dB)55 Hz~20 kHz(-10 dB)
- **NOMINAL COVERAGE** ^(-6dB): 80° (H) 80°(V) Constant directivity
- **SENSITIVITY** (@1w/1m): 96 dB SPL
- **POWER RATING**(AES): 350W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 121dB SPL 127dB SPL peak
- **DRIVERS:** L.F: 1X10"driver
H.F: 1X3"(75mm voice coil) compression driver

Physical data


- **DIMENSIONS**(HxWxD): 420x310x310mm / 16.5"x12.2"x12.2"
- **WEIGHT:** 18 kg / 39.7lbs
- **CONNECTORS:** NEUTRIK NL4MP #2
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 15mm, 18mm multi-plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

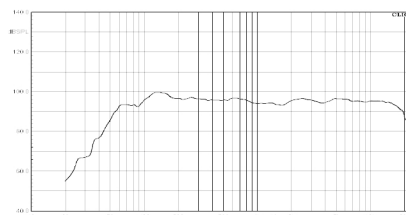


Frequency response

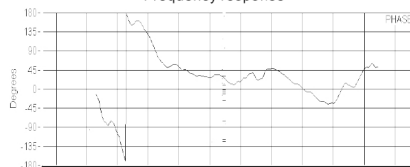


Phase response

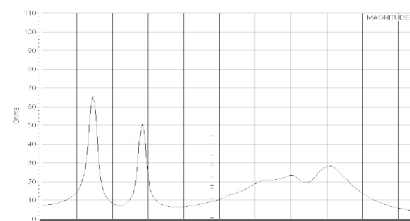

Impedance



Front



Top



Side