


CP12

Applications


- Conference room
- Church
- Fill system

Feature


- 75mm HF compression driver
- Low frequency response extend to 50Hz
- Excellent vocal performance

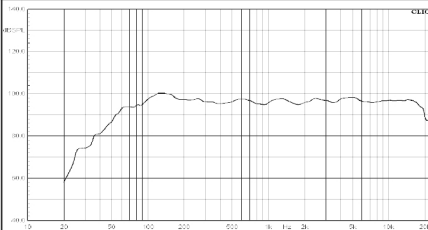

Frequency response

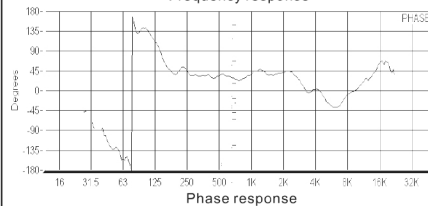

Phase response

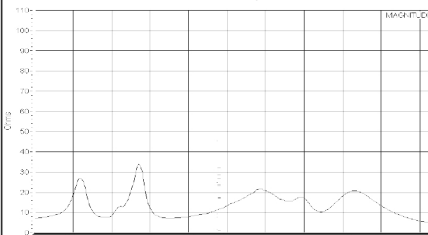

Impedance

Technical specification

- **FREQUENCY RESPONSE:** 60 Hz~16 kHz(± 3 dB)45 Hz~18 kHz(-10 dB)
- **NOMINAL COVERAGE⁽¹⁾(°dB):** 80° (H) 80°(V) Constant directivity
- **SENSITIVITY(@1w/1m):** 97 dB SPL
- **POWER RATING(AES):** 400W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 123dB SPL, 129dB SPL peak
- **DRIVERS:** L F: 1X12"driver
HF: 1X3" (75mm voice coil) compression driver

Physical data

- **DIMENSIONS(HxWxD):** 480x370x370mm / 18.9"x14.6"x14.6"
- **WEIGHT:** 22 kg / 48.5 lbs
- **CONNECTORS:** NEUTRIK NL4MP *2
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 15mm, 18mm multi-plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam

