



LA212

Applications

- ➊ Touring performance
- ➋ Stadium
- ➌ Theatre

Feature





- ➊ Large-scale, tri-amp, three-way line array system
- ➋ MF & HF parts is coaxial structure to optimise acoustic image
- ➌ Neodymium high-sensitivity driver, maximum headroom

Technical specification

- ➊ **FREQUENCY RESPONSE:** 50 Hz ~ 16 kHz (±3dB) / 40 Hz ~ 18 kHz (-10dB)
- ➋ **NOMINAL COVERAGE^(±6dB):** 100°(H) adjustable
- ➌ **SENSITIVITY(@1w/1m):** HF:113 dB SPL / MF:105 dB SPL / LF:100 dB SPL
- ➍ **POWER RATING(AES):** HF/MF/LF:160W/350W/800W
- ➎ **NOMINAL IMPEDANCE:** HF/MF/LF:16/16/12 ohm
- ➏ **MAXIMUM SPL:** HF:141 dB peak / MF:136dB peak / LF:135 dB peak
- ➐ **DRIVERS:**
LF 2 x 12" (75mm Voice coil) woofer
MF 1 x 10" (65mm voice coil) mid range
HF 2 x 3" compression driver

Physical data


- ➊ **DIMENSIONS(HxWxD):** 367 x 1000 x 550mm / 14"x39"x22"
- ➋ **WEIGHT:** 63 kg / 139 lbs
- ➌ **CONNECTORS:** 2 x NL8 connectors
- ➍ **SPEAKER CABLES:** 1+1...LF, 2+2...MF, 3+3...HF,4+4...N/C
- ➎ **MATERIALS:** 18mm, 24mm Baltic birch plywood
- ➏ **FINISH:** Black Polyurea paintings
- ➐ **GRILLE:** Black epoxy mesh grille with acoustically reticulated cloth
- ➑ **RIGGING:** 0, 1, 2, 3, 4, 5, 6, 7.5 degree adjustable

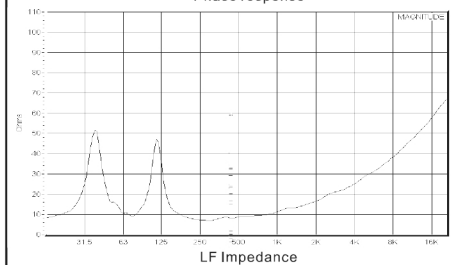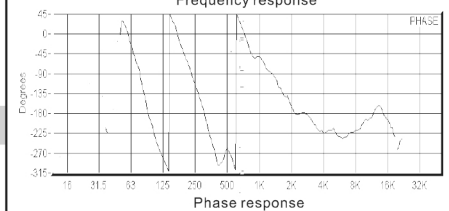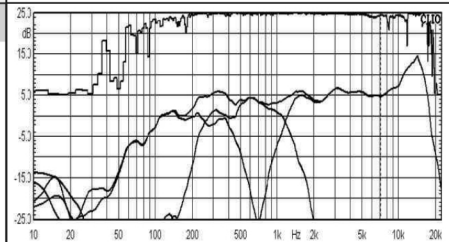

Front



Top



Side