



LC10S

Applications

- ④ Subwoofer with LC10
- ④ Touring performance
- ④ Club, multi-function hall
- ④ Church

Feature




- ④ The most cost-effective small and medium-sized line array
- ④ Extremely compact, Small enclosure, light weight
- ④ High SPL, great dynamic headroom
- ④ Multi-angle adjustable mounting mode with adjustable support

Technical specification


- ④ FREQUENCY RESPONSE: 40 Hz ~ 150 Hz (± 3 dB)
- ④ NOMINAL COVERAGE^(-90°): Omnidirectional
- ④ SENSITIVITY(@1w/1m): 98 dB SPL
- ④ POWER RATING(AES): 500W(AES)
- ④ NOMINAL IMPEDANCE: 8 ohm
- ④ MAXIMUM SPL: 125 dB SPL_{peak}
- ④ DRIVERS: 1 x 15"woofer (75mm voice coil)

Physical data


- ④ DIMENSIONS(HxWxD): 371 x 641 x 600mm
- ④ WEIGHT: 35 kg / 77 lbs
- ④ CONNECTORS: 2 x NL4 connectors
- ④ SPEAKER CABLES: 1+1...
- ④ MATERIALS: 15mm,18mm Baltic birch plywood
- ④ FINISH: Black Polyurea paintings
- ④ GRILLE: Black epoxy mesh grille with acoustically reticulated cloth
- ④ RIGGING: 0,-5 degree adjustable

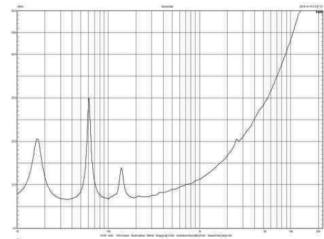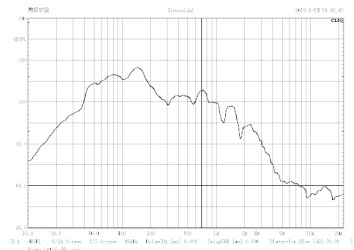

Front



Side



Top